

TECHNICAL DATA SHEET

OSB 4

Bonzano OSB is the first poplar oriented strand panel in the world. The innovative production process allows for larger (up to 120 x 40 mm) and thinner (0,8 mm) strands to be obtained, compared to traditional OSB, guaranteeing a unique mechanical-weight performance ratio. The panel is bonded with high performance MDI glue without formaldehyde and resistant to humidity.

Characteristics:

- light, uniform colour
- no added formaldehyde
- moisture proof
- lightweight
- mechanical performances
- easy to work and cut
- wide range of thicknesses and formats

Sizes (mm)


(Other sizes are available on request)

1250 x 2500

Thicknesses (mm)

(Other thicknesses are available on request)

18

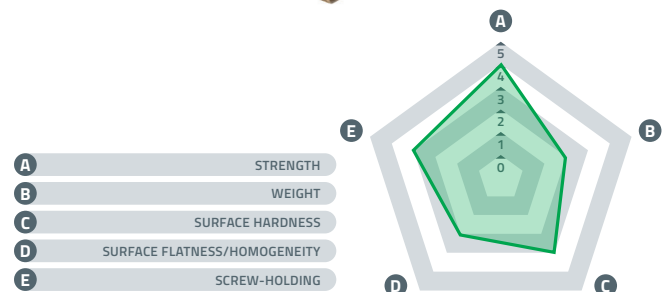

PROPERTY	STANDARD	UNIT OF MEASURE	THICKNESS (mm)			
			12	15	18	25
Density	EN323	Kg/m ³ (+/- 5%)	550	540	530	520
Internal bond	EN 319	N/mm ² (+/- 5%)	0,45	0,45	0,4	0,4
Longitudinal bending strength	EN 310	N/mm ² (+/- 5%)	28	28	26	26
Transversal bending strength	EN 310	N/mm ² (+/- 5%)	15	15	14	14
Longitudinal elasticity module	EN 310	N/mm ² (+/- 5%)	4800	4800	4800	4800
Transversal elasticity module	EN 310	N/mm ² (+/- 5%)	1900	1900	1900	1900
Screw-holding – faces	EN 320	N (+/- 10%)	1000			
Screw-holding – edges (≥ 15mm)	EN 320	N (+/- 10%)	800			
Swelling 24h	EN317	% (+/- 5pp)	12	12	12	12
Boil test	EN1087-1	N/mm ² (+/- 5%)	0,15	0,15	0,13	0,13
Thermal conductivity	EN 12664	W/mK (+/- 5%)	0,1			
Moisture content	EN 322	%	5-12			
Fire resistance	EN 13501-1	thickness > 8mm	D-s2,d0			
TOLERANCES						
Thickness	EN 324-1	mm	sanded +/- 0,3; unsanded +/- 0,8			
Length/ Width	EN 324-1	mm	+/- 3,0			
Squareness	EN 324-2	mm/m	2			
Edge straightness	EN 324-2	mm/m	1,5			

FIELDS OF APPLICATION



CONSTRUCTION

CERTIFICATIONS/TEST REPORTS



(on request)

(on request)

EXPOSURE CLASSIFICATION



Humid interior/
covered exterior

The data in this sheet show approximate values obtained from internal testing on normal production. It is the buyer's responsibility to determine whether the Bonzano products are suitable for the applications for which they are intended to be used and that the modes of transport and use comply with current regulations.